


CURVE E DATI DI PRESTAZIONE /

CURVES AND PERFORMANCE

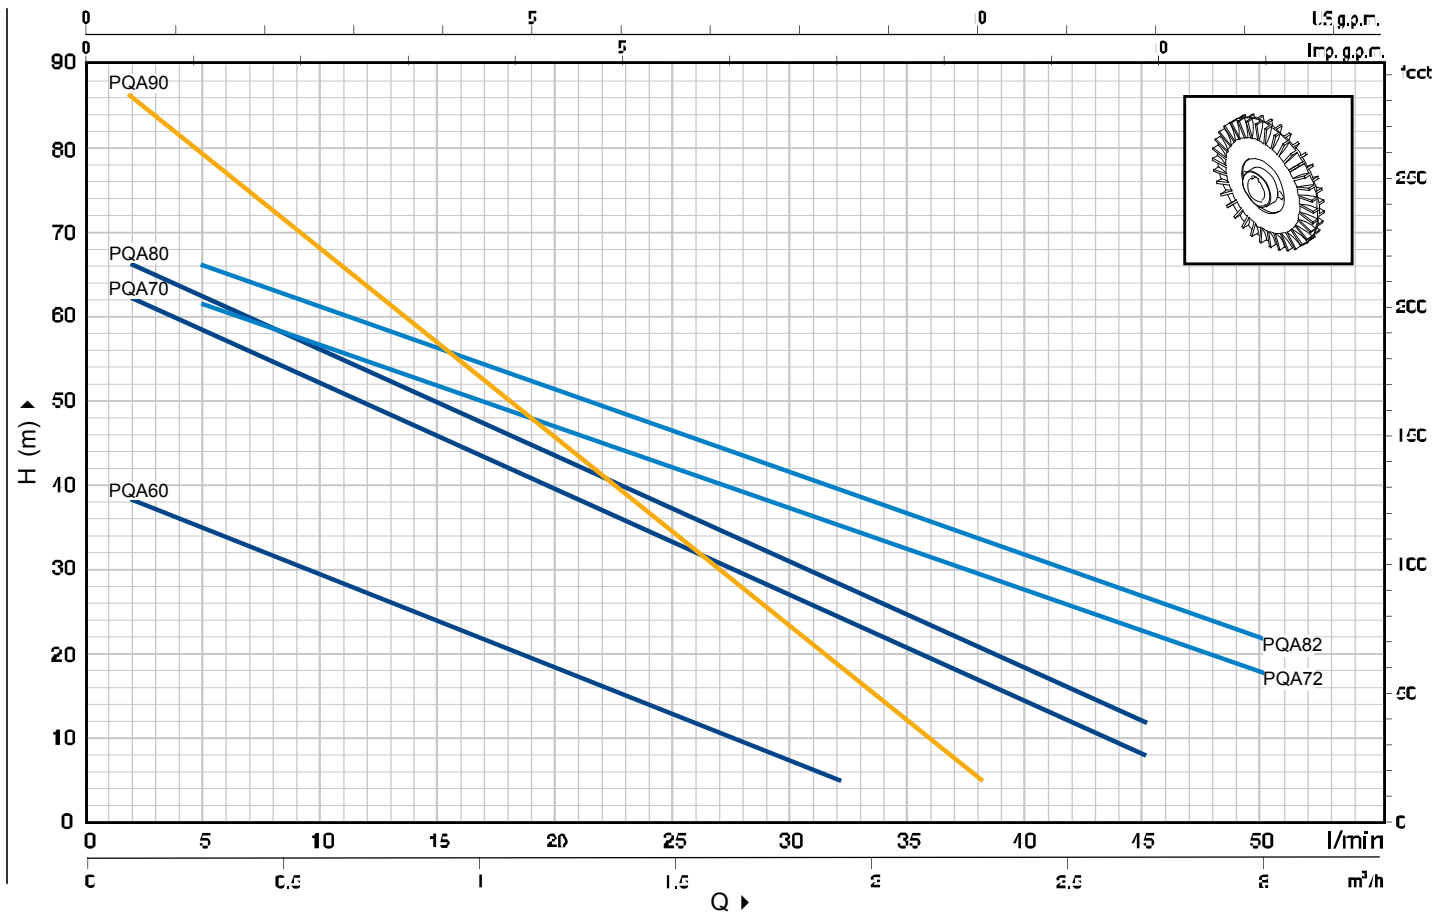


MODELLO TYPE		POTENZA POWER		Q	H(m)														
1 ~	3 ~	kW	HP		m³/h	0	0.1	0.3	0.6	0.9	1.2	1.5	1.8	1.9	2.3	2.7	3.0		
				l/min	0	2	5	10	15	20	25	30	32	38	45	50			
PQAm 60	PQA 60	0.37	0.50	H(m)	40	38	35	29	23.5	18	12.5	7	5						
PQAm 70	PQA 70	0.55	0.75		65	62	58	52	45.5	39.5	33	27	24	16.5	8				
PQAm 72	PQA 72	0.55	0.75		65	-	62	57	52	47	42	37.5	35.5	29.5	22.5	18			
PQAm 80	PQA 80	0.75	1		70	66	62	56	49.5	43	37	31	28	20.5	12				
PQAm 82	PQA 82	0.75	1		70	-	66	61	56	51	46	41.5	39.5	37.5	26.5	22			
PQAm 90	PQA 90	0.75	1	90	86	79	68	56.5	45.5	34	23	18.5	5						

Q = Portata H = Prevalenza manometrica totale
Q = Flow rate H = Total manometric head

Tolleranza delle curve di prestazione secondo EN ISO 9906 App. A.
Tolerance of the performance curves according to EN ISO 9906 App. A.App. A.

DIMENSIONI E PESI /

DIMENSIONS AND WEIGHTS

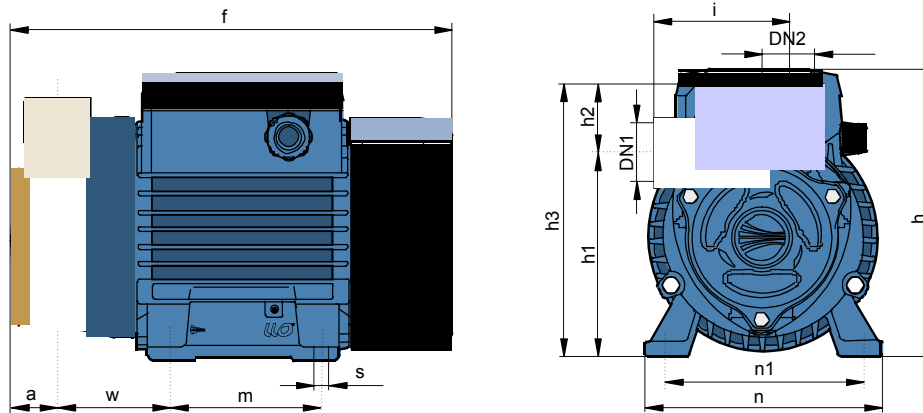

TIPO TYPE		BOCCHIE PORTS		DIMENSIONI mm DIMENSIONS mm												kg	
1~	3~	DN1	DN2	a	f	h	h1	h2	h3	i	m	n	n1	w	s	1~	3~
PQAm 60	PQA 60	1/2"	1/2"	25	226	152	103	33	136	72.5	80	120	100	55	7	4.8	4.8
PQAm 70	PQA 70						116.5	32.5	149							9.4	8.4
PQAm 72	PQA 72	1"	1"	28	258	179	121	30	151	83	90	138	112	62	7	9.5	8.5
PQAm 80	PQA 80	1/2"	1/2"				116.5	32.5	149	72.5						9.4	8.4
PQAm 82	PQA 82	1"	1"	28	258	179	121	30	151	83	90	138	112	62	7	9.5	8.5
PQAm 90	PQA 90	1/2"	1/2"					35	156	76						9.5	8.5

- Corpo pompa: tecnopolimero speciale
- Girante: ottone
- Lanterna: brevetto n° IT1243605
- Coperchio frontale del corpo pompa: ottone
- Modello comunitario registrato n° 342159-0001

Consigliate per uso industriale

- Pump body: advanced technopolymer
- Impeller: brass
- Motor bracket: patented n° IT1243605
- Front pump body cover: brass
- Registered Community Design n° 342159-0001

Suitable for industrial applications